



Elix


Instruções de montagem
3D File
Dados fotométricos
Revit



PX-0251-INO

Aplique IP44 Elix LED 6.2W 4000K Aço inoxidável 129lm

CARACTERÍSTICAS TÉCNICAS



IP44 IK04



Potência (W) : 6.2W

Consumo total da luminária (W) : 7.8W

Lúmenes reais : 129

Lm/W reais : 17

Temperatura da cor : Branco neutro - 4000K

Ângulo Óticas / Refletor : FLOOD 77°

Material da estrutura : Aço inoxidável AISI 202

Acabamento estrutura : Aço inoxidável

Material do difusor : Vidro

Acabamento difusor : Transparente

Vida útil : 36.000h L70B30

Equipamento incluído : Sim, eletrônico

Tensão / Frequência : 100-240V/50-60Hz

Garantia : 5 Anos

Temperatura máx. : 25°C

Eficiência energética : LED A++

CARACTERÍSTICAS LUMINOTÉCNICAS

Fonte de luz: LED

CRI: 80



MacAdam steps: 3

Risco fotobiológico: RG0

UGR

UGR Transversal: 1.7

UGR Longitudinal: 12.2



LOGÍSTICA


Peso líquido (kg): 0.64

Peso embalado (kg): 0.75

Embalagem: 110mm x 70mm x 170mm



8 Un

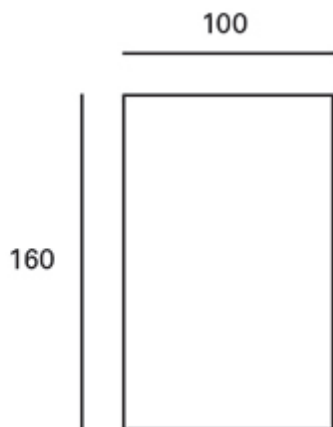

Luminaire


Code PX-0251-INO
Name Aplique dir/ind. 2 leds

Measur.

Code PX-0251-INO
Name Aplique dir/ind. 2 leds

Luminaire Flux	129.20 lm	Luminaire Power	6.00 W	Efficacy	21.53 lm/W	Efficiency	100.00%
Lamps Flux	129.20 lm	Maximum value	359.06 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire Rectangular Luminous Area	Length Length	90 mm 62 mm	Width Width	40 mm 25 mm	Height Height	125 mm 125 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.001550 m2 0.007750 m2 0.003125 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.007750 m2 0.003125 m2 0.007895 m2				
Coordinate system Date Measurement Distance	CG 27-01-2017 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Double Symmetrical 180 129.20 lm				
Operator Temperature Humidity Notes	Asselum T2 25.00 °C 60.00 %	Source Voltage [V] Source current [A] Photocell					

Line	Code	Luminaire Lamps Name	Flux [lm]	Pow. [W]	Q.ty
	05-9593	05-9593	129.20	6.00	1
C.I.E. F UTE	76 97 99 50 100 0.50 B + 0.50 T	D DIN 5040 B NBN	C61 BZ 1		

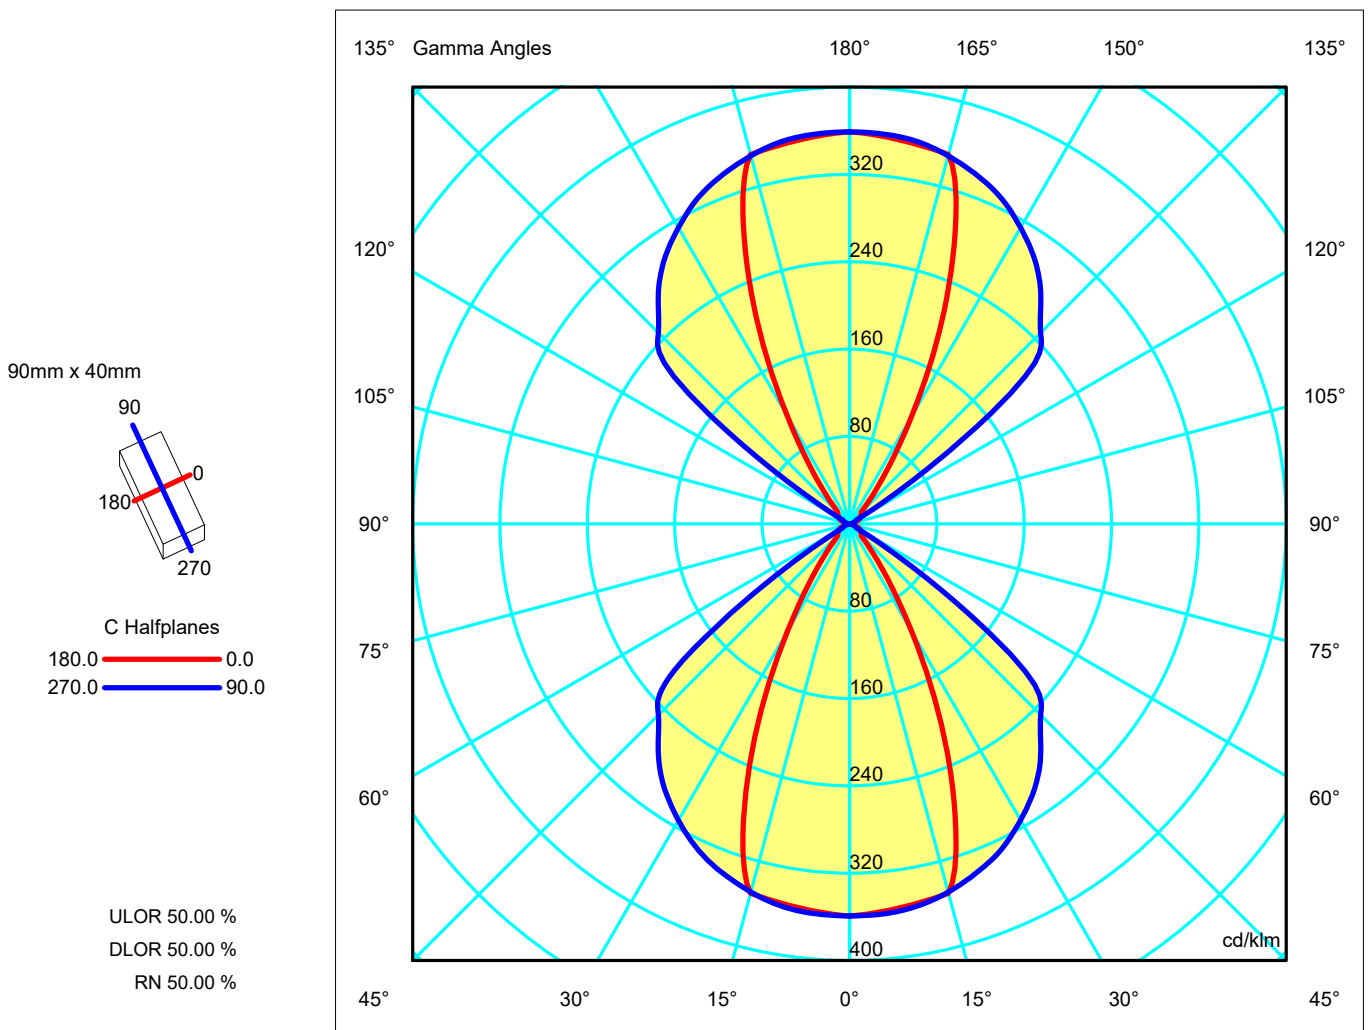

Luminaire

Code PX-0251-INO
Name Aplique dir/ind. 2 leds


Measurement

Code PX-0251-INO
Name Aplique dir/ind. 2 leds


Luminaire Flux	129.20 lm	Luminaire Power	6.00 W	Efficacy	21.53 lm/W	Efficiency	100.00%
Lamps Flux	129.20 lm	Maximum value	359.06 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

Luminous Intensity Table cd/klm Table 1/1


	C 0.00	C 15.00	C 30.00	C 45.00	C 60.00	C 75.00	C 90.00
G 0.0	359.06	359.06	359.06	359.06	359.06	359.06	359.06
G 5.0	356.11	356.00	356.11	356.43	356.95	357.63	358.41
G 10.0	353.16	352.87	353.02	352.69	353.07	354.11	355.70
G 15.0	350.22	353.92	348.56	347.68	346.76	347.18	349.01
G 20.0	282.58	291.64	316.30	345.83	338.47	337.93	340.13
G 25.0	195.04	207.18	243.82	296.97	330.24	326.51	329.04
G 30.0	113.77	125.20	163.97	231.49	306.53	311.30	313.30
G 35.0	59.20	66.91	95.67	160.71	257.13	293.67	295.64
G 40.0	29.03	33.31	50.90	98.38	199.12	277.50	272.46
G 45.0	15.25	16.98	25.40	54.80	138.90	252.98	247.43
G 50.0	13.88	12.71	13.31	27.46	84.17	200.85	210.05
G 55.0	12.52	12.54	11.68	12.73	42.53	91.67	82.33
G 60.0	11.15	10.97	10.55	9.77	16.76	14.73	7.48
G 65.0	9.72	9.76	9.19	7.87	6.90	6.18	5.86
G 70.0	6.84	7.01	7.51	6.22	5.37	4.67	4.79
G 75.0	4.07	4.17	4.66	4.98	3.86	3.54	3.55
G 80.0	2.63	2.64	2.77	2.98	3.06	2.87	2.08
G 85.0	3.07	2.99	2.92	2.64	2.66	2.61	1.20
G 90.0	2.57	2.49	2.41	2.41	2.49	2.65	0.88
G 95.0	3.07	2.99	2.92	2.64	2.66	2.61	1.20
G100.0	2.63	2.64	2.77	2.98	3.06	2.87	2.08
G105.0	4.07	4.17	4.66	4.98	3.86	3.54	3.55
G110.0	6.84	7.01	7.51	6.22	5.37	4.67	4.79
G115.0	9.72	9.76	9.19	7.87	6.90	6.18	5.86
G120.0	11.15	10.97	10.55	9.77	16.76	14.73	7.48
G125.0	12.52	12.54	11.68	12.73	42.53	91.67	82.33
G130.0	13.88	12.71	13.31	27.46	84.17	200.85	210.05
G135.0	15.25	16.98	25.40	54.80	138.90	252.98	247.43
G140.0	29.03	33.31	50.90	98.38	199.12	277.50	272.46
G145.0	59.20	66.91	95.67	160.71	257.13	293.67	295.64
G150.0	113.77	125.20	163.97	231.49	306.53	311.30	313.30
G155.0	195.04	207.18	243.82	296.97	330.24	326.51	329.04
G160.0	282.58	291.64	316.30	345.83	338.47	337.93	340.13
G165.0	350.22	353.92	348.56	347.68	346.76	347.18	349.01
G170.0	353.16	352.87	353.02	352.69	353.07	354.11	355.70
G175.0	356.11	356.00	356.11	356.43	356.95	357.63	358.41
G180.0	359.06	359.06	359.06	359.06	359.06	359.06	359.06

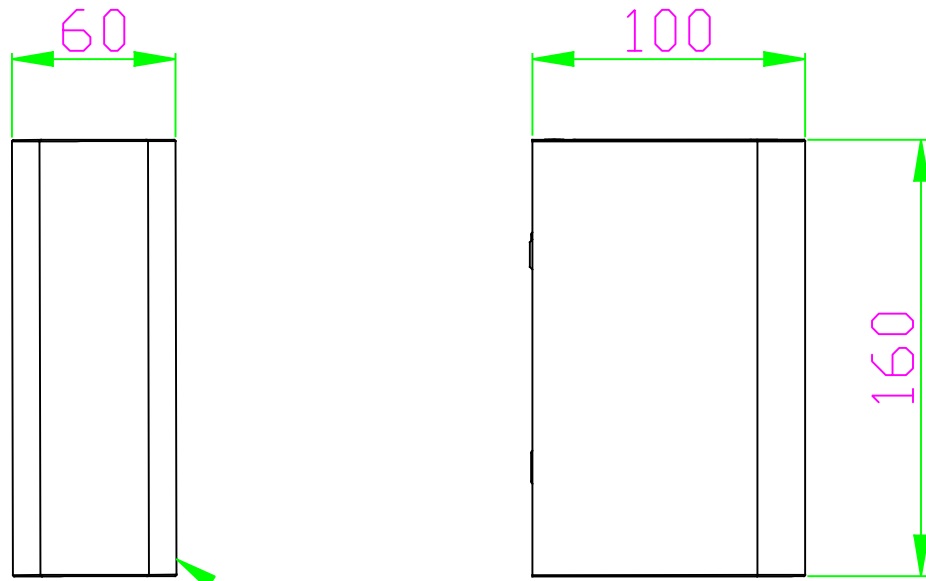


Stainless steel AISI 202




Transparent glass

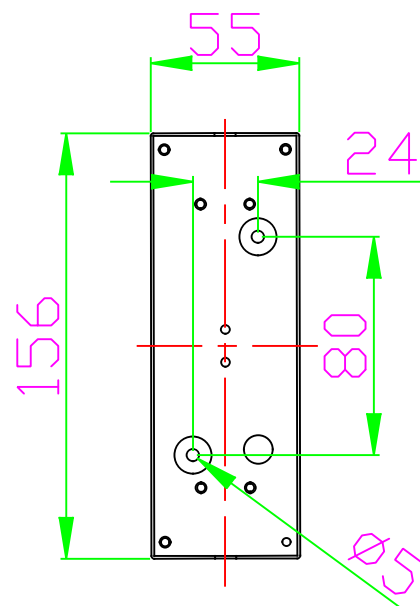



Elix
PX-0251

FOR
LIGHT



1

2

3

4

L	⊕	L
⊖	⊖	⊖
N	⊕	N

5

6

7

ON

